![Lanberg]

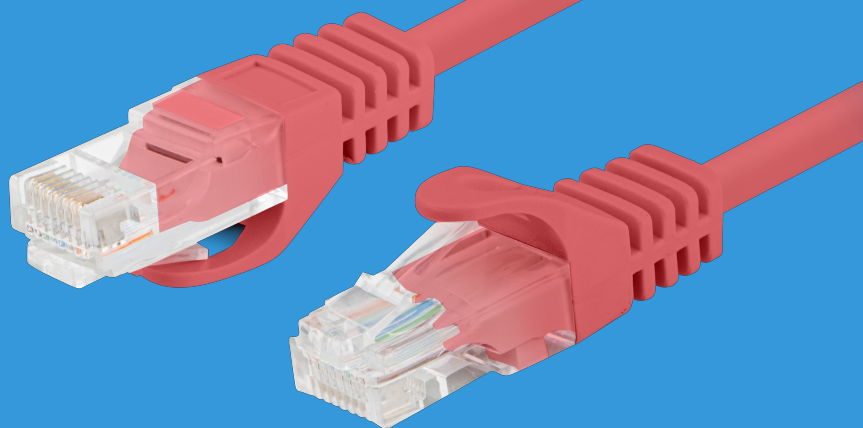# PCU5-10CC-0100-R

PATCHCORD CAT.5E UTP

PRODUCT FEATURES:

- Cable without shielding – U/UTP
- Category compliance confirmed by Fluke tester
- Stranded wires made from CCA

PRZEWODNIK

IZOLACJA HD-PE

OTULINA

PRODUCT SPECIFICATION:

Cable length	100 cm
ICT category	Cat. 5/5e
Shielding type	U/UTP
Colour	Red
AWG	26
Coating	PVC
External lagging	4,8 mm
Maximum operating frequency	up to 100 MHz
Material	Copper plated (CCA)